




# Pressure Gauge with Swivel (PGS)

## Specifications

- Dial Size: 2" (50mm)
- Case: Black Steel
- Wetted Parts: Copper Alloy
- Bezel: Black Steel
- Lens: Glass Window
- Socket and Connection: Copper Alloy
- Movement: Copper Alloy
- Bourdon Tube: Brass
- Pointer and Dial: Aluminum Finish
- Connection: Top Mount — 3/4" Female Copper Alloy Swivel Connection
- Scale: Single Scale PSI
- Accuracy: 3-2-3% of Span, ASME Grade B
- Ambient Temperature: -20-60C

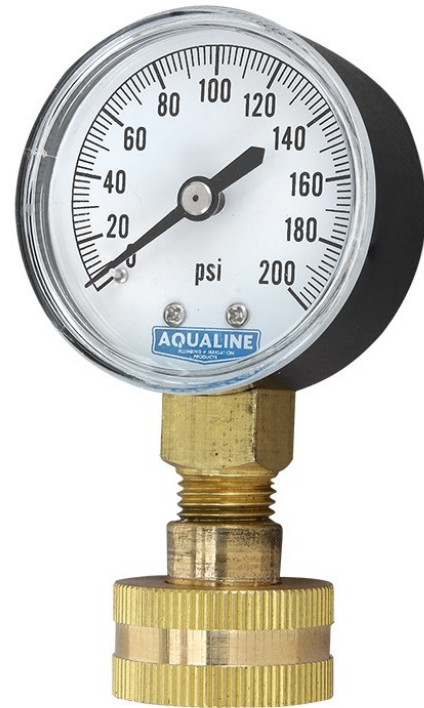

## Swivel Specifications

Parts	Materials			
Nipple Nut	Brass B124 C37700			
Packing	SN-719F			
Nipple	Brass B124 C37700			
Code Size	Dimension (MM)			
3/4" FHTx1/4" Female	H	L	LI	D
	26.8	30	15.5	-

## Models

- PG15S (Counts in 5's)
- PG30S (Counts in 5's)
- PG60S (Counts in 10's)
- PG100S (Counts in 10's)
- PG160S (Counts in 20's)
- PG200S (Counts in 20's)

## Application

- Utility water test gauge with horizontal housing
- For pressure tests of residential and commercial piping system