

PRO-SPRAY® PRS30

To maintain consistent performance and reduce water waste, the Pro-Spray PRS30 Sprinkler Body is pressure-regulated to an optimal pressure of 30 PSI.

KEY BENEFITS

- Industry's strongest sprinkler body for years of reliable performance
- Pressure-regulated to 30 PSI for optimal nozzle performance
- Brown cap for easy field identification
- Co-molded wiper seal made from chemical- and chlorine-resistant materials
- Innovative seal design prevents cap-to-body leaks, even with a loose cap
- FloGuard Technology option eliminates water waste in the event of a missing nozzle

ADDITIONAL FEATURES

- Directional flush plug design for cleaner installation
- Interchangeable components for easier servicing, retrofits, and upgrades
- Heavy-duty spring for consistent riser retraction
- Check valve option eliminates low-head drainage
- Compatible with all female-threaded nozzles

OPERATING SPECIFICATIONS

- Operational pressure range: 15 to 100 PSI
- Warranty period: 5 years

FACTORY-INSTALLED OPTIONS

- Check valve available for 4", 6", and 12" models (up to 14' of elevation)
- Reclaimed water identification
- FloGuard Technology available for check valve models

USER-INSTALLED OPTIONS

- Check valve (P/N 437400SP)
 - Up to 10' of elevation for 3" model
 - Up to 14' of elevation for 4", 6", and 12" models
- Reclaimed water ID cap (P/N 458560SP)
- Snap-on reclaimed cover (P/N PROS-RC-CAP-SP)
- Shutoff cap (P/N 213600SP)
- Shutoff nozzle (P/N 916400SP)



PRS30 Reclaimed

Optional factory-installed purple reclaimed water caps



FloGuard Technology

Eliminate water waste in the event of a missing nozzle



PROS-00-PRS30

Retracted height: 4½"
Inlet size: ½"




PROS-03-PRS30

Retracted height: 5"
Pop-up height: 3"
Exposed diameter: 2¼"
Inlet size: ½"



PROS-04-PRS30

Retracted height: 5⅞"
Pop-up height: 4"
Exposed diameter: 2¼"
Inlet size: ½"

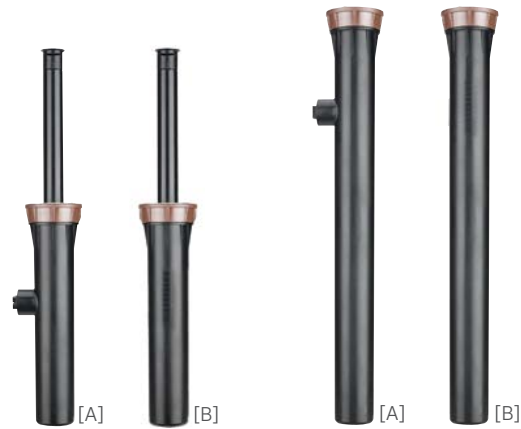

[A] PROS-06-SI-PRS30

[B] PROS-06-PRS30
Retracted height: 8¾"
Pop-up height: 6"
Exposed diameter: 2¼"
Inlet size: ½"

[A] PROS-12-SI-PRS30

[B] PROS-12-PRS30
Retracted height: 16⅞"
Pop-up height: 12"
Exposed diameter: 2¼"
Inlet size: ½"

PRO-SPRAY PRS30 – SPECIFICATION BUILDER: ORDER 1 + 2 + 3

1 Model	2 Feature Options	3 Specialty Options
<p>PROS-00-PRS30 = 30 PSI regulated shrub adapter PROS-03-PRS30 = 30 PSI regulated 3" pop-up PROS-04-PRS30 = 30 PSI regulated 4" pop-up PROS-06-PRS30 = 30 PSI regulated 6" pop-up PROS-12-PRS30 = 30 PSI regulated 12" pop-up</p>	<p>(blank) = No option CV = Factory-installed drain check valve <i>(4", 6", and 12" models only)</i></p>	<p>(blank) = No option R = Factory-installed reclaimed body cap F = FloGuard Technology F-R = FloGuard Technology with reclaimed body cap</p>

PRO-SPRAY PRS30 (SIDE INLET) MODELS

Model

PROS-06-SI-PRS30 = 30 PSI regulated 6" pop-up with side inlet

PROS-12-SI-PRS30 = 30 PSI regulated 12" pop-up with side inlet

Examples:

PROS-06-SI-PRS30 = 6" pop-up with side inlet regulated at 30 PSI

PROS-06-PRS30-CV = 6" pop-up regulated at 30 PSI, drain check valve

PROS-12-PRS30-CV-F-R = 12" pop-up regulated at 30 PSI, drain check valve, and FloGuard Technology with reclaimed body cap

Compatible with:



Pro Adjustable Nozzles

Pro Fixed Nozzles